







# RackingSolutions



**HELP LINE**  
**01977 555007**

-  **Information**  
if in doubt contact the supplier
-  Please read these instructions thoroughly before commencing assembly.
-  Inspect all packages for damage and check that all components have been supplied
-  Assembly should be undertaken by at least two people
-  **Caution**  
During Assembly
-  Wear appropriate clothing - protective gloves and footwear are recommended
-  Dispose of packaging materials responsibly
-  Make sure the floor is level
-  Allow adequate working space and be aware of others working around you
-  Take care when handling heavy items particularly when lifting or stretching
-  **Warning**  
Rules for safe use of shelving
-  Not suitable for use in damp or wet environments.
-  ENSURE THAT THE MAXIMUM LOAD CARRYING CAPACITIES ARE NOT EXCEEDED
-  Shelves must be loaded evenly, and load heavier items on the bottom shelves
-  Never climb or stand on the shelves.

<p><b>A</b></p>  <p>UPRIGHTS X 4</p>	<p><b>D</b></p>  <p>PLASTIC FEET X 4</p>
<p><b>B</b></p>  <p>LONG BEAMS X 8</p>	<p><b>E</b></p>  <p>15MM CHIPBOARD X4</p>
<p><b>C</b></p>  <p>SIDE BEAMS X 8</p>	<p><b>F</b></p>  <p>CENTRAL SUPPORT X 12</p>


**TOOLS REQUIRED**



**RUBBER Mallet**

# Assembly instructions-400kg shelves

- 1** Select two uprights **A** and push on plastic feet **D** to the bases. Insert a short side beam **C** into the keyholes at the lowest shelf level required.



- 2** Tap beam **C** with a rubber mallet to ensure the end studs are fully located in the bottom of the keyholes on both uprights. Lean the uprights **A** against a wall for support if needed



- 3** Repeat steps 1 and 2 until you have created a "ladder style frame"

*Tip: Now is a good time to check the space between beams suits the items you want to store on the shelves and adjust as required*




- 4** Select two more uprights **A** and repeat steps 1 to 3 until you have a second "ladder style frame"

*Tip: Use the first frame as a template to get the correct spacing*



- 5** Take two long beams **B** and insert them into the keyholes on one frame at the same height as the short beams. Tap into place with a rubber mallet

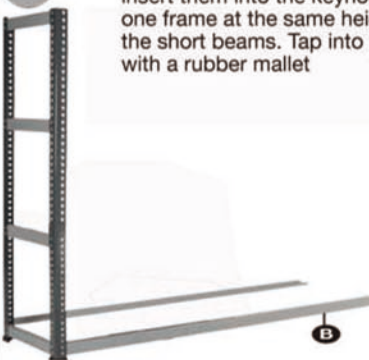

- 6** Insert the other ends of the beams **B** into the second frame as in step 5



- 7** Repeat steps 5 and 6 to add the remaining long beams. Ensure that each long beam is located at the same height as the side beams



- 8** Locate 3 support beams **F** onto the metal studs on each long beam **B**. Tap into place and repeat for all levels



- 9** Insert chipboard decks **E** into each level-decks sit on the top of the beams inside.

