

ASSEMBLY INSTRUCTIONS

RackingSolutions

Chrome 2-Tier Rack **OC-001**




Please inspect box contents to ensure you have received all components.

Note: the black circular plastic tops in between the shelves are used only for packaging purposes. They are NOT NEEDED. Please discard responsibly & keep away from small children.


Total weight capacity is 60 kg on casters.

HELP LINE
01977 555007


PACKAGE CONTENTS




AX1
Rubberwood Top



BX1
Basket



CX4
Top Pole (with end cap and
pole connector pre-installed)




DX4
Bottom Pole (with threaded
insert pre-installed)



EX16+2
extra Slip sleeve



FX2
Sidebar



GX4
Casters (2 locking;
2 non-locking)



Information

if in doubt contact the supplier



Please read these instructions
thoroughly before commencing
assembly.



Inspect all packages for damage and
check that all components have been
supplied



Assembly should be undertaken by
at least two people



Caution

During Assembly



Wear appropriate clothing - protective
gloves and footwear are
recommended



Dispose of packaging materials
responsibly



Make sure the floor is level



Allow adequate working space and be
aware of others working around you



Take care when handling heavy items
particularly when lifting or stretching



Warning

Rules for safe use of shelving



Not suitable for use in damp or wet
environments.



ENSURE THAT THE MAXIMUM LOAD
CARRYING CAPACITIES ARE NOT
EXCEEDED



Shelves must be loaded evenly, and load
heavier items on the bottom shelves



Never climb or stand on the shelves.

TOOLS REQUIRED




Rubber Mallet

ASSEMBLY INSTRUCTIONS

STEP 1: ASSEMBLING THE CASTERS

Screw each Caster (G) into the bottom of each Bottom Pole (D). Turn clock-wise to screw in place. Screw in tightly.




STEP 2: SLIP SLEEVES

On the Bottom Pole (D), place 1 pair of slip sleeves (E) at the desired level. Please make sure the arrow faces up and that the word "top" is right side up. Do this for each Bottom Pole (D) and make sure that the heights are identical for Bottom Pole (D).

Slide the pair of Slip Sleeves (E) until you hear a click to confirm the pair is locked onto the Bottom Pole (D). Do not place more than one pair on each Pole (D) at a time.



****Note:** There will be a very small gap in-between the Slip Sleeves (E) -this is normal.

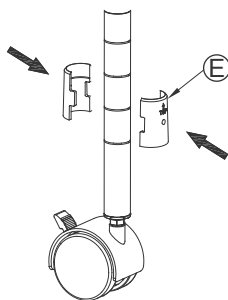

STEP 3 : INSTALLING THE BASKET


Place The Basket (B) on its side and slide the Bottom Pole (G) through the holes in the Basket (B). Make sure that the Basket (B) corner cylinders are positioned over the Slip sleeves (E). Stand the unit upright.

****Use a rubber mallet, if needed, to secure the Basket(B).**

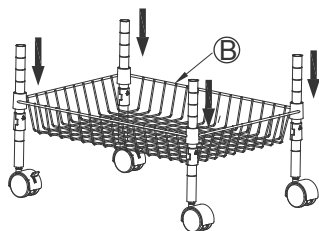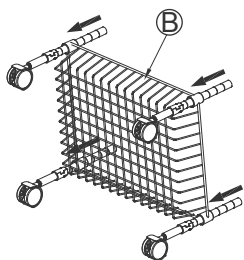


STEP 4 INSTALLING TOP POLES

Screw the Top Pole (C) into the Bottom Pole (D). The tops of these poles are indicated by the black end up.

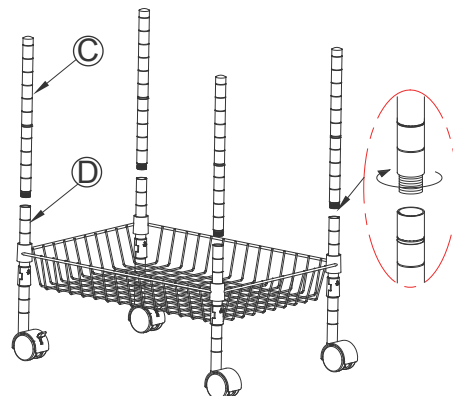


STEP 5: INSTALLING THE RUBBERWOOD TOP

Repeat Step 2 for the Rubberwood Top (A) and place the slip sleeves (E) at the highest position. Slide Rubberwood Top onto the Slip Sleeves (E).

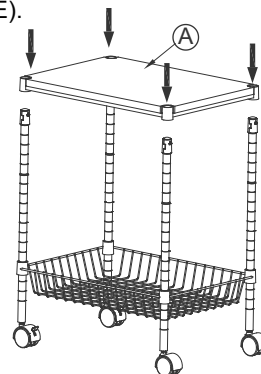

STEP 6: INSTALLING THE SIDEBAR

Place the sidebar (F) on the poles as shown.

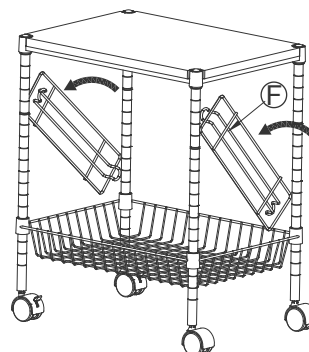

STEP 7: FINISH AND ENJOY YOUR QUALITY RACKING SOLUTION PRODUCT

